


## PVC Schedule 40 Pressure Pipe

- ASTM D 1785
- ASTM D 2665 – 1 ½, 2, 3, 4, 6-12 inch trade sizes
- ASTM F 480 – 2-12 inch trade sizes
- Solvent-weld bells
- 10-foot or 20-foot overall lengths
- White in color

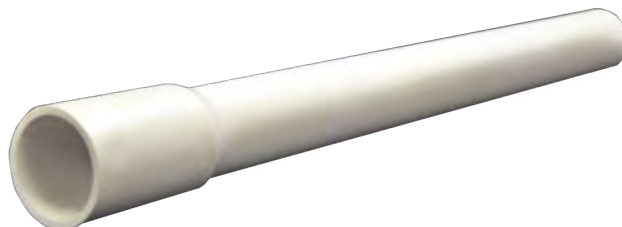

Trade Size	Part Number		Solid or Perf Pattern	Pressure Rating (psi)	Average O.D. (inches)	Approximate Weight per 100' (lbs)	Standard Crate Quantity (feet)	
	10-foot	20-foot					10-foot	20-foot
<b>Solid-wall</b>								
½	5405010	5405020	Solid	600	0.840	16	3,600	7,200
¾	5407510	5407520	Solid	480	1.050	22	4,000	8,000
1	5410010	5410020	Solid	450	1.315	32	2,800	5,600
1 ¼	5412510	5412520	Solid	370	1.660	43	2,200	4,400
1 ½	5415010	5415020	Solid	330	1.900	51	1,800	3,600
2	5420010	5420020	Solid	280	2.375	69	1,050	2,100
2 ½	5425010	5425020	Solid	300	2.875	110	730	1,460
3	5430010	5430020	Solid	260	3.500	144	750	1,500
4	5440010	5440020	Solid	220	4.500	205	570	1,140
5	5450010	5450020	Solid	190	5.563	278	380	760
6	5460010	5460020	Solid	180	6.625	361	260	520
8	5480010	5480020	Solid	160	8.625	559	150	300
10	–	54100020	Solid	140	10.750	770	–	80
12	–	54120020	Solid	130	12.750	1,018	–	60
<b>Perforated</b>								
4	5440010FH	5440020FH	4-8	–	4.500	205	570	1,140
	5440010FH468	5440020FH468	4-6-8					
6	5460010FH	5460020FH	4-8	–	6.625	361	260	520
	5460010FH468	5460020FH468	4-6-8					

Perforated pipe, with 5/8-inch holes, 5 inches on center, are available in 2-hole and 3-hole configurations:

2-hole: 4-8 o'clock position - 120° apart

3-hole: 4-6-8 o'clock position - 60° apart

NOTE: Special orders are non-cancelable, non-returnable and non-refundable.