


Five-Degree Bell x Spigot Couplings

PVC Electrical Conduit Fittings and Accessories

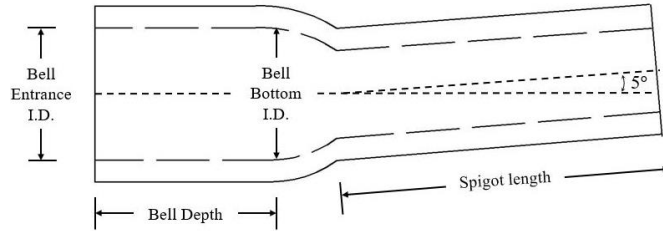

Trade Size (in)	SCH40*		DB120**		Bell Entrance I.D.	Bell Bottom I.D.	Bell Depth	Approx. Overall Length
	Catalog Part Number	System Part Number	Catalog Part Number	System Part Number				
1½	--	--	605EC15BS	924168	1.918	1.894	2.25	2.63
2	405EC20BS	924348	605EC20BS	924520	2.393	2.369	2.25	2.63
2½	405EC25BS	925252	--	--	2.890	2.868	3.50	3.88
3	405EC30BS	924349	605EC30BS	924522	3.515	3.492	3.75	4.13
4	405EC40BS	924350	605EC40BS	924524	4.515	4.491	4.00	4.38
5	405EC50BS	924352	605EC50BS	924526	5.593	5.553	4.50	4.88
6	405EC60BS	924353	605EC60BS	924528	6.658	6.614	5.25	5.63
8	405EC80BS	925946	--	--	8.670	8.610	5.25	5.63

- Approximate overall length is prior to bend
- Dimensions are nominal (inches) and are subject to normal manufacturing tolerances
- *SCH40 and SCH80 bell dimensions per NEMA TC-2 and TC-3
- **DB Bell dimensions per NEMA TC-2 and ASTM F512